


MANUAL CYLINDER VALVES LIGHT VT




description

- Manual cylinder valve without internal venting system
- Max working pressure: 260 bar
- Working temperature: -40°C +85°C
- Safeties: available without safeties or with a combination of thermal safety / excess flow / burst disk
- TPRD pipe - away safety port

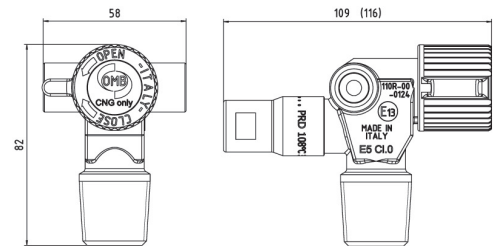

product

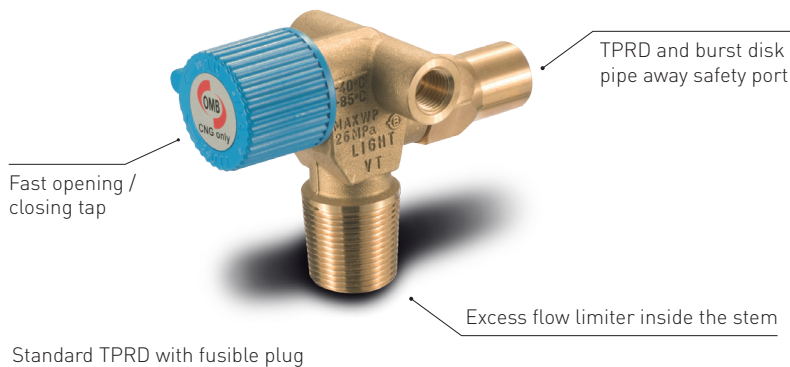

Locking wrench for valve type LIGHT VT

certifications

ECE R110 - CCOE - CERTIFIED

Cylinder connections	Inlet/outlet pipe and venting port connections	Thermal safety + Burst disk, in line solution
1" BS 341	M 12X1	LIGHTVT000
	1/4" NPT	LIGHTVT001
1" 1/8 UNF	M 12X1	LIGHTVT002
	1/4" NPT	LIGHTVT003
3/4 NGT	M 12X1	LIGHTVT004
	1/4" NPT	LIGHTVT005
W28.8	M 12X1	LIGHTVT006
	1/4" NPT	LIGHTVT007